




## LD SERIES

## LINEAR DIFFUSERS-NARROW FLANGE

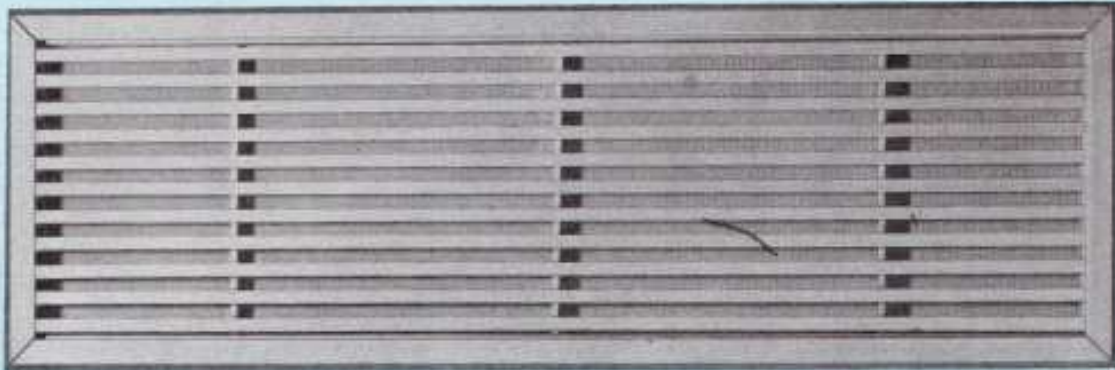

LD	0° deflection
LD-15	15° deflection
LD-OB	0° deflection with opposed blade damper
LD-15-OB	15° deflection with opposed blade damper

LD-C	Core only - 0°
LD-C15	Core only - 15°
LDC-OB	Core only - 0° - with OBD
LDC-15-OB	Core only - 15° - with OBD

Note: OBD shipped separately for duct installation.

**DESIGN:** Narrow flange linear diffusers available in a variety of sizes and configurations of extra heavy duty design, these units are pencil and heel proofed as standard. Available with model OB opposed blade dampers.

**FEATURES:** NARROW FLANGE for a more unobtrusive appearance.  
 CORNER KEY construction for greater rigidity and more tightly closed mitres.  
 PENCIL AND HEEL-PROOF bar spacing standard.  
 Key operated opposed blade dampers available FACTORY INSTALLED (optional)

**CONSTRUCTION:** Constructed entirely of extra-heavy aluminum extrusions.  
 .050" frame thickness.  
 Anodized finish. Can be painted, if desired, without priming.  
 Sections made up to maximum of 10 feet each.

**APPLICATION:** While designed primarily for side wall application, the LD Series lends itself to any application where a heavy duty, continuous length unit is required.

**NOTE:** Concealed mounting brackets available upon request.

MAXIMUM MULLION SPACING IS 6 INCHES.

