


LD WF SERIES

LINEAR DIFFUSERS—WIDE FLANGE

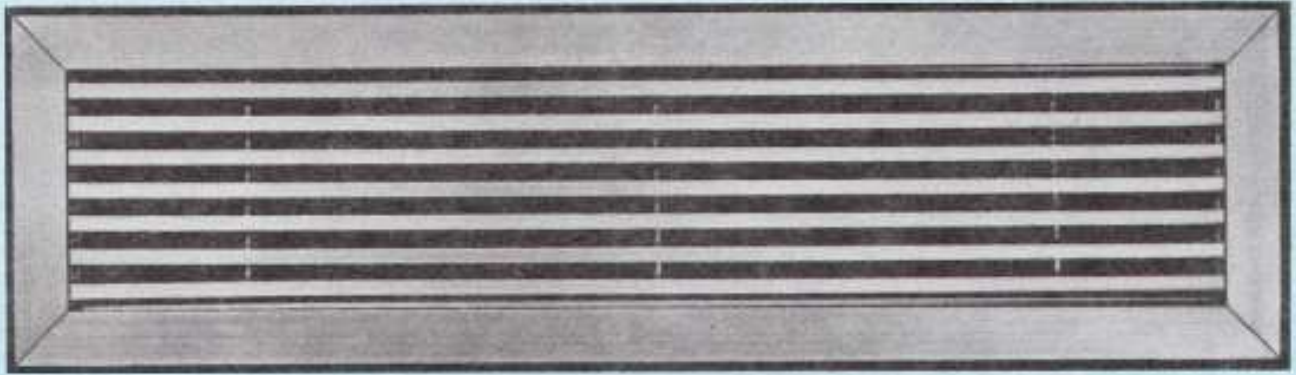

| | |
|------------|---|
| LDWF | 0° deflection |
| LDWF-15 | 15° deflection |
| LDWF-OB | 0° deflection, with opposed blade damper |
| LDWF-15-OB | 15° deflection, with opposed blade damper |

DESIGN: Wide flange linear diffusers available in a variety of sizes and configurations of extra heavy duty design, these units are pencil and heel proofed as standard. Available with model OB opposed blade dampers.

FEATURES: WIDE FLANGE for a more secure installation where openings cannot be precisely cut.
 CORNER KEY construction for greater rigidity and more tightly closed mitres.
 PENCIL AND HEEL-PROOF bar spacing standard.
 Screwdriver operated opposed blade dampers available FACTORY INSTALLED (optional)

CONSTRUCTION: Constructed entirely of extra-heavy aluminum extrusions.
 .050" frame thickness.
 Anodized finish. Can be painted, if desired, without priming.
 Sections made up to maximum of 10 feet.

APPLICATION: While designed primarily for floor application LDWF Series lends itself to any application where a heavy duty, continuous length unit is required.

NOTE: Concealed mounting brackets available upon request.

MAXIMUM MULLION SPACING IS 6 INCHES.

