




SL SERIES -

SLOT DIFFUSERS - ($\frac{3}{4}$ " Slot) – With Concealed Mounting Bracket (1" & $\frac{1}{2}$ " Available)

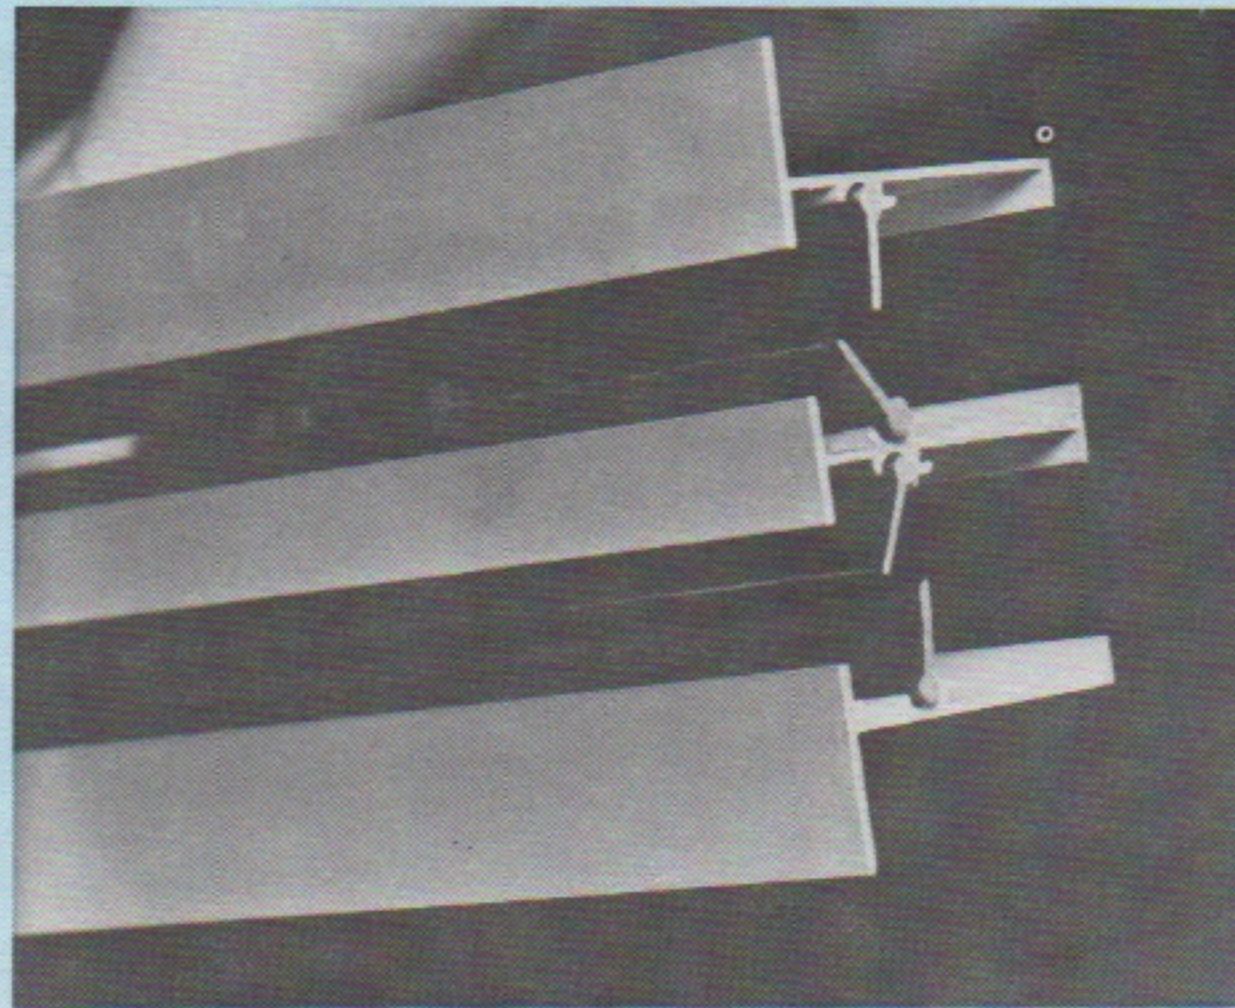

DIMENSIONS

	No. of Slots									
	1	2	3	4	5	6	7	8	9	10
A	$1\frac{1}{2}$	$2\frac{15}{16}$	$4\frac{3}{8}$	$5\frac{13}{16}$	$7\frac{1}{4}$	$8\frac{11}{16}$	$10\frac{1}{8}$	$11\frac{9}{16}$	13	$14\frac{7}{16}$
Duct Width	$2\frac{3}{16}$	$3\frac{5}{8}$	$5\frac{1}{16}$	$6\frac{1}{2}$	$7\frac{15}{16}$	$9\frac{3}{8}$	$10\frac{13}{16}$	$12\frac{1}{4}$	$13\frac{11}{16}$	$15\frac{1}{8}$
Frame Width	$2\frac{1}{4}$	$3\frac{11}{16}$	$5\frac{1}{8}$	$6\frac{9}{16}$	8	$9\frac{7}{16}$	$10\frac{7}{8}$	$12\frac{5}{16}$	$13\frac{3}{4}$	$15\frac{3}{16}$
Overall Width	3	$4\frac{7}{16}$	$5\frac{7}{8}$	$7\frac{5}{16}$	$8\frac{3}{4}$	$10\frac{3}{16}$	$11\frac{5}{8}$	$13\frac{1}{16}$	$14\frac{1}{2}$	$15\frac{15}{16}$

All Dimensions in Inches.

MODEL: SL-B - Concealed Mounting Bracket.

FEATURES: Direction of blow may be altered from face of slot after installation. Inner Vanes control direction and act as damper control.

CONSTRUCTION: Aluminum extrusions throughout. .062 nominal thickness. Maximum length for one section is 60". End caps optional.

FINISHES:

1. Anodized throughout
2. Anodized frame - black inner vanes
3. White enamel frame - black inner vanes

