


SL SERIES - SLOT DIFFUSERS (3/4" Slot)

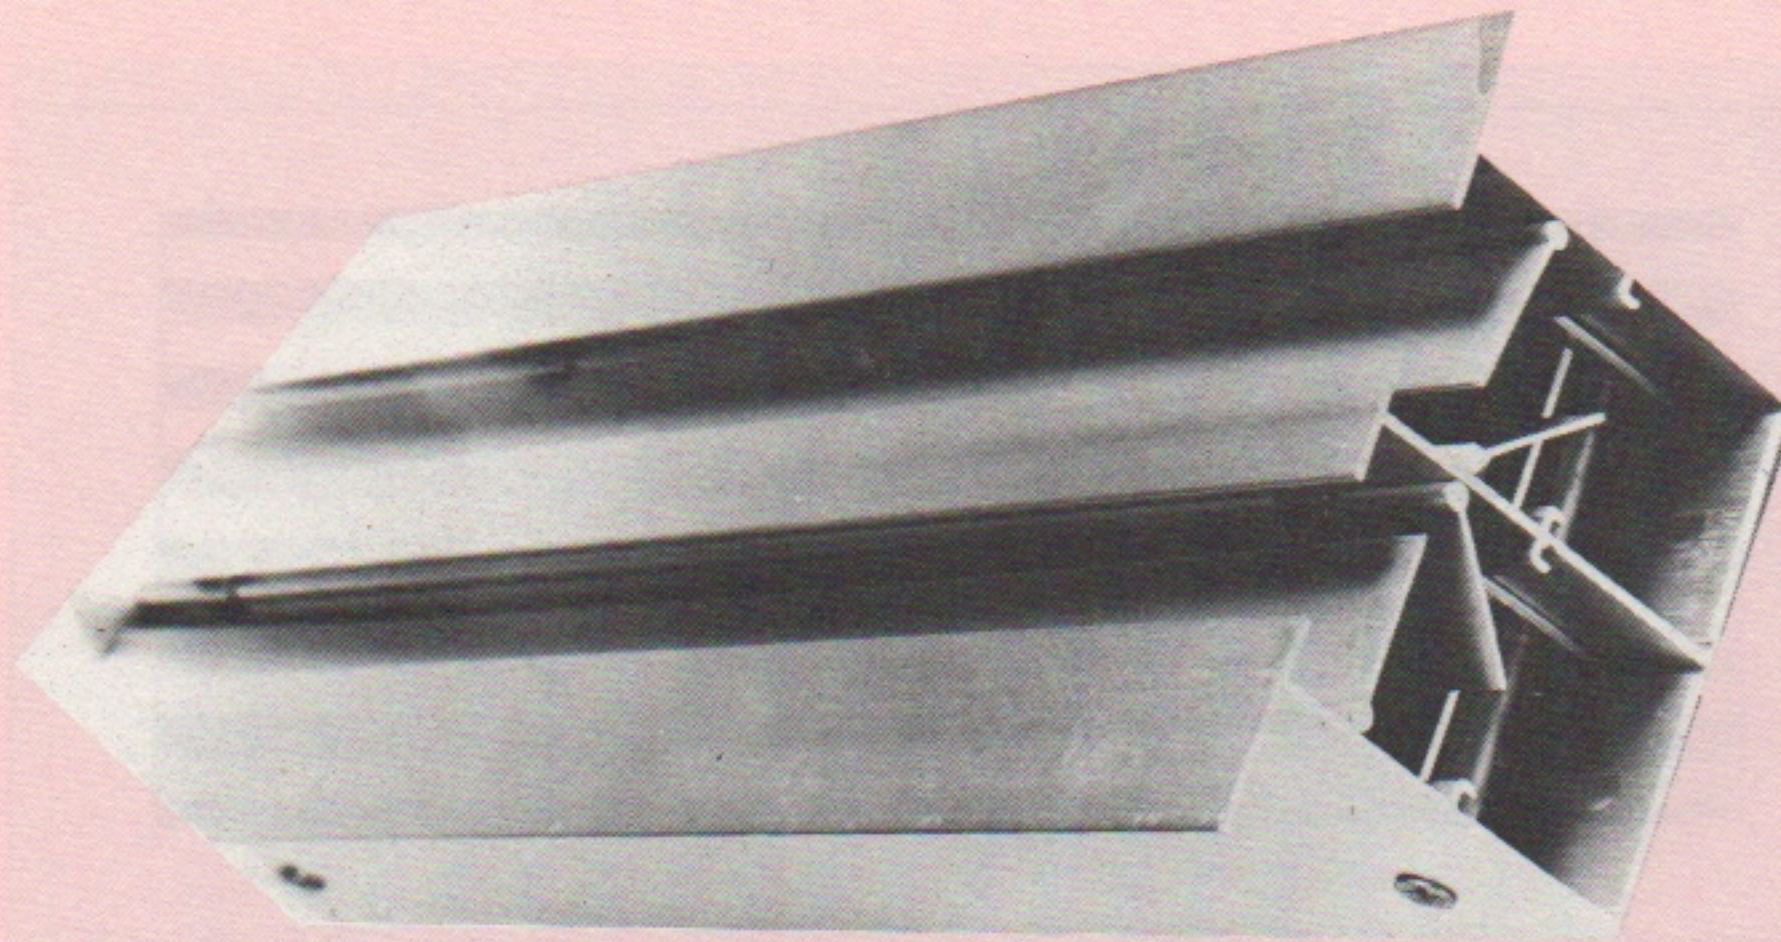

DIMENSIONS

	No. of Slots									
	1	2	3	4	5	6	7	8	9	10
A	1½	2-15/16	4-3/8	5-13/16	7¼	8-11/16	10-1/8	11-9/16	13	14-7/16
Duct Width	1-5/8	3-1/16	4½	5-15/16	7-3/8	8-13/16	10¼	11-11/16	13-1/8	14-9/16
Clg. Opng. Width	1-11/16	3-1/8	4-9/16	6	7-7/16	8-7/8	10-5/16	11¾	13-3/16	14-5/8
Oall Width	3	4-7/16	5-7/8	7-5/16	8¾	10-3/16	11-5/8	13-1/16	14½	15-15/16

All Dimensions in Inches.

MODEL: (SL-S – Screw mounted)
(SL-T – T Bar lay in - no screw holes)

FEATURES: Direction of blow may be altered from face of slot after installation. Inner vanes control direction and act as damper control.

CONSTRUCTION: Aluminum extrusions throughout. .062 nominal thickness. Maximum length for one section is 60". End caps optional.

FINISHES: 1. Anodized throughout
2. Anodized frame - black inner vanes
3. White enamel frame - black inner vanes

